NETWORKED RADIATION TRACKING SYSTEM


Models ~ DSI-2NT-ITS

FEATURES:

- **DETECT & TRACK MOVEMENT OF VEHICLES** CARRYING GAMMA AND/OR NEUTRON RADIOACTIVE MATERIALS
- **ENHANCE EXISTING SECURITY**
 - WITHIN FACILITY
 - **AROUND TOWN**
 - **BORDER CROSSING**
 - SHIPPING / RAIL YARD
 - WEIGH STATION, ETC.
- **EASY PLACEMENT OF DETECTORS:**
 - TRAFFIC LIGHTS
 - **BUILDINGS**
 - INDUSTRIAL COMPLEXES
- SENSITIVE 1µ R/hr RESOLUTION, WIDE RANGE
- SMALL SIZE, RUGGED, SPLASH PROOF
- USER SETTABLE ALARM LEVELS
- TARGETED AND OMNI-DIRECTIONAL DETECTORS
- CONNECTS TO EXISTING NETWORK
- **OPTIONAL:** CAN BE SET TO ALLOW INTERNET ACCESS FROM REMOTE SITES
- **OPTIONAL: WIRELESS REMOTE NOTIFICATION -**PHONE, EMAIL, TEXT, ETC.
- RS-232 BASED ALARM AND DATA COLLECTION
- **OPTIONAL: ETHERNET**



DSI-2NT-ITS TRAFFIC SIGNAL MOUNT

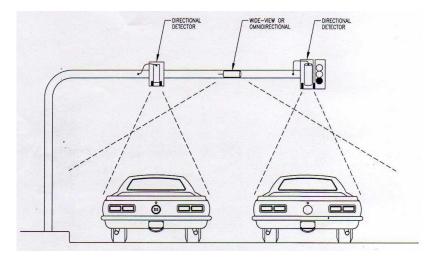





TECHNICAL ASSOCIATES OVERHOFF TECHNOLOGY





OTCQB - UCLE

NETWORKED RADIATION TRACKING SYSTEM

Models ~ DSI-2NT-ITS

APPLICATION:

The **DSI-2NT-ITS** system is designed specifically for use to give warning in case of illicit or accidental storage or transport of radioactive material. Use for travel and shipment centers, power plants, hospitals, landfills, customs entry and exit points, border crossings, seaports, airports, etc.

Installing a network of **DSI-2NT-ITS**detector systems throughout any highly traveled area; city thoroughfares. shipping centers, border crossings, industrial complexes, etc. will provide enhanced security to the public or work place safety.

By networking a number of **DSI-2NT-ITS** detector systems will provide detection and tracking of radioactive sources.

EXAMPLE OF NETWORKED TRAFFIC SIGNALS:

Each installation of DSI-2NT-ITS detector systems will contain 1-3 detectors: choice of Low Gamma, Medium Gamma, or Neutron, or all three. The detectors and electronics are contained in a rugged, weather-proof case. In this example of traffic control systems: The electronics will be hard wired into the traffic signal box at each intersection. Data download from the traffic signal box to the traffic control center will piggy back on the existing infrastructure.

At each location a baseline of background radiation level is recorded and stored locally at the central control station. This provides the data required to provide an alarm of detection of any increase of radiation about the set baseline for that intersection.

REASON FOR NEUTRON DETECTION: Some fissile materials have only WEAK Gamma emissions which are hard to detect. These materials also have spontaneous Neutron emissions. Detection of even a few Neutrons is significant since the natural background Neutron count rate is ZERO. When the Neutron indicator comes on the operator knows that Neutrons from fissile material are present.

TERRORIST SCENARIO:

THREE TIME PERIODS:

- 1. Baseline time period: Have Baseline Map Available: Background varies from place to place, due to natural causes, and old pollution and uranium and potassium in road and building materials.
- 2. **Prior to Detonation:** The terrorist moves radioactive materials into an area, for storage or pre-positioning a dirty bomb or nuclear bomb.
- 3. After Detonation: An industrial accident, or a dirty bomb explosion releases large amounts of radioactive material in solid, liquid, or airborne form.

SPECIFICATIONS:

DETECTOR	LOW GAMMA	HIGH GAMMA	NEUTRON	
TARGETED AND OMNI-DIRECTIONAL DETECTORS				
Energy Interpretation	Below 400kev Nuclear Medicine	Above 400kev Dirty Bombs or waste	All Energies Nuclear Bombs	
Sensor	Nal (or BGO) Scintillation Crystal	Nal (or BGO) Scintillation Crystal	BF3 Proportional Probe	
Sensor Size	2" dia x 2" thick	2" dia x 2" thick	1" dia x 8" L	
Energy Range	1 μR/Hr - 1mR/h	1 μR/Hr - 1mR/h	0-1000 μRem/h - 1 Rem/h*	









OTCQB - UCLE

NETWORKED RADIATION TRACKING SYSTEM

Models ~ DSI-2NT-ITS

DESCRIPTION ~ ELECTRONICS:

- Small Gamma and Neutron monitor will alarm on radiation level settable down to background level.
- The **DSI-2NT-ITS** can alarm at any of 99 preset levels.
- Measures exposure rate.
- Dose rate is displayed on a local LCD display.
- When the alarm set-point is reached, the alarm relay is triggered.
- Connects to existing network
- Can be set to allow internet access from remote sites
- Optional: wireless remote notification phone, email, text, etc.
- Serial or ethernet based alarm and data collection

ALADNE MICRO-R/HR ON OVER THE CONTROL OF THE CONTRO

DSI-E

ELECTRONICS

PORTABLE - DSI-E

Display: Local Digital

Readout: 6 digit LCD for Rate, 8 Digit for integrate. Optional backlight

Integration: Into existing traffic or monitoring/surveillance system

Controls: Power Set (calibration aid), Zero Adjust/Background Suppress,

Meter, Programming (Two buttons).

Alarm: Audio / Visual

Data Output: RS-232 OPTIONA: ETHERNET **Temperature:** 14° F to 104° F (-10 C° to 40° C)

Power: IDEALLY: The DSI-2NT-ITS system will be powered by host traffic light system.

OPTIONAL: in-place rechargeable batteries.

Case: Deep drawn aluminum case, with handle and gasketed lid,

easily cleanable polished stainless-steel chamber.

Construction: Rugged, Lightweight

WEIGHT & DIMENSIONS:

Instrument Case: 5" W x 12" L x 7" H (Including optional handle)

Display Panel: 5.5" Long x 3" Wide. Weight: 3 lbs.

OTHER NETWORKED SYSTEMS AVAILABLE:

TYPE	MODEL
Installed Vehicle Monitor: Beta, Gamma	VMF-TA
Portable or Installed Personnel & Vehicle Monitor: Beta, Gamma	PPVM-TA
Airborne Particulates: Alpha, Beta, Gamma. OPTIONAL: Radon	ABG-NET
Mobile Radiation Detector: Beta, Gamma, Neutron	MORAD & SUPER MORAD





TECHNICAL ASSOCIATES
OVERHOFF TECHNOLOGY



OTCQB - UCLE